



Connection
to the future

CAIXAS EQUIPADAS

LOFER EQUIPADA | REF .: PC9014010PM

IP54 | 16A

pvp. 164€ + IVA Entrada: 5P 16A (cabo de 2 mts)
Saídas: 2x 5P 16A + 4x schuko



ANIF4 EQUIPADA

REF .: PC9134518PM ou PC9134518PME*
(*com botão de emergência)

IP54 | 32A

Entrada: 5P 32A (cabo de 2 mts)
Saídas: 1x 5P 16A + 1x 5P 32A + 4x schuko

pvp. 320€ + IVA



IMST EQUIPADA | REF .: PC9030010

IP44 | 16A

pvp. 119€ + IVA

Entrada: 5P 16A
Saídas: 2x 5P 16A + 4x schuko





IMST EQUIPADA | REF .: PC9030020

IP44 | 16A

Entrada: 5P 16A (cabo de 2 mts)
Saídas: 2x 5P 16A + 5x schuko

pvp. 168,79€ + IVA





PIMENTEIRO STECKY 11+
(4xSCHUKO 16A+2xCEE 16A 5p)
REF .: VR60960



pvp. 124,40€ + IVA

PIMENTEIRO STECKY 12+
(4xSCHUKO+1xCEE 16A+1xCEE 32A)
REF .: VR60962



pvp. 242,0€ + IVA

PIMENTEIRO STECKY 11+
(4xSCHUKO+2xCEE+1xFI 40A 30mA)
REF .: VR60961



pvp. 235,30€ + IVA

**PIMENTEIRO STECKY 13+(4xSCHUKO
32A+2xCEE 32A 4.5m 5G4
REF .: VR60963**



pvp. 405,30€ + IVA



QUADRO DE OBRAS

QUADRO DISTR.IP66 32A 400V AC C/BOT.EMERG.E BOB.DISPARO
REF .: SC671.6560-1848



PREÇO ESPECIAL 330€ + IVA




QUADRO DE OBRAS EQUIPADO - 10 MÓDULOS - IP44

Conteúdo do quadro:

- > 3 tomadas schuko de encastrar (ASTI112R)
- > 1 tomada fêmea encast. 16A 3P+T 400V 6H IP44 (ASTI314)
- > 1 tomada fêmea encast. 16A 3P+T+N 400V 6H IP44 (ASTI315)
- > 1 Int. dif 4x40A 30mA (ASGR44030)
- > 1 Disj. Trip. 3P 16A (ASGM316)
- > 3 Disj. Unip. 16A (ASGM116)

REF.	AxBxC		EAN.
ASQ021940801	219x408 x105mm	1	5604612736774

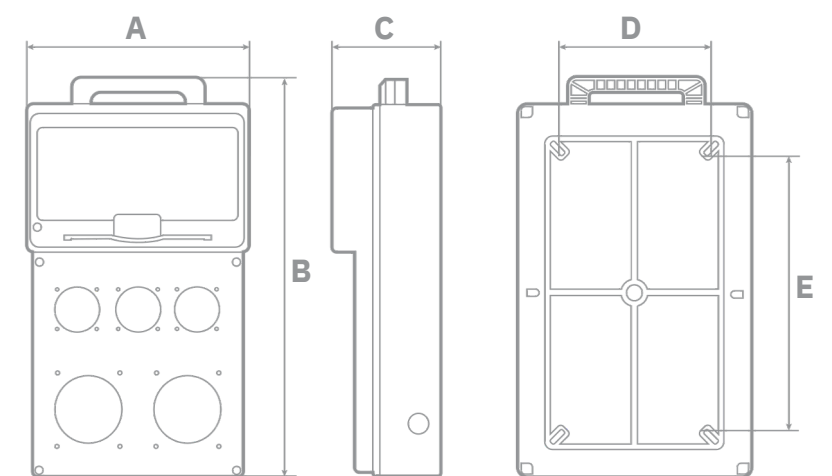

164,7€ + IVA




QUADRO DE OBRAS EQUIPADO - 12 MÓDULOS - IP44

Conteúdo do quadro:

- > 4 tomadas schuko de encastrar (ASTI112R)
- > 1 tomada fêmea encast. 32A 3P+T 400V 6H IP44 (ASTI325)
- > 1 tomada fêmea encast. 16A 3P+T+N 400V 6H IP44 (ASTI315)
- > 1 Int. dif 4x40A 30mA (ASGR44030)
- > 1 Disj. Trip. 3P 16A (ASGM316)
- > 4 Disj. Unip. 16A (ASGM116)

REF.	AxBxC		EAN.
ASQ026036001	260x360 x125mm	1	5604612736811

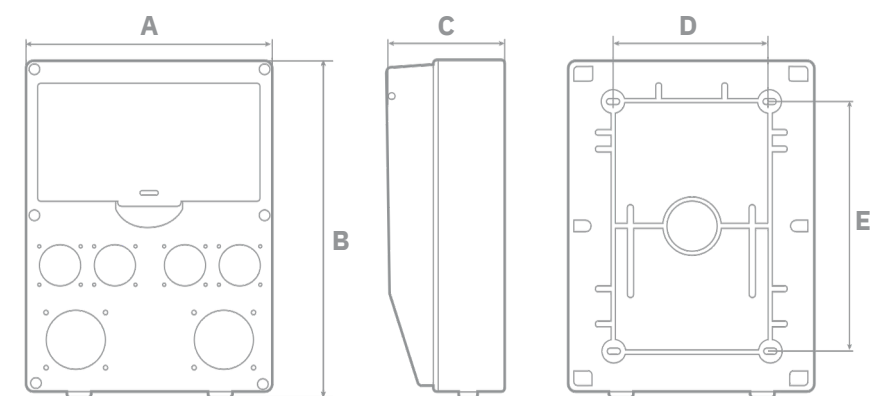

191,5€ + IVA




QUADRO DE OBRAS EQUIPADO - 14 MÓDULOS - IP44

Conteúdo do quadro:

- > 6 Tomadas schuko de encastrar (ASTI112R) > 1 Tomada fêmea encast. 16A 2P+T 230V 6H IP44 (ASTI313) > 1 tomada fêmea encast. 16A 3P+T 400V 6H IP44 (ASTI314) > 1 tomada fêmea encast. 16A 3P+T+N 400V 6H IP44 (ASTI315) > 1 Int. Dif 4x40A 30mA (ASGR44030) > 1 Disj. TRIP. 3P 16A (ASGM316) > 4 DISJ. UNIP. 16A (ASGM116)

REF.	AxBxC		EAN.
ASQ032042001	320x420 x170mm	1	5604612736798

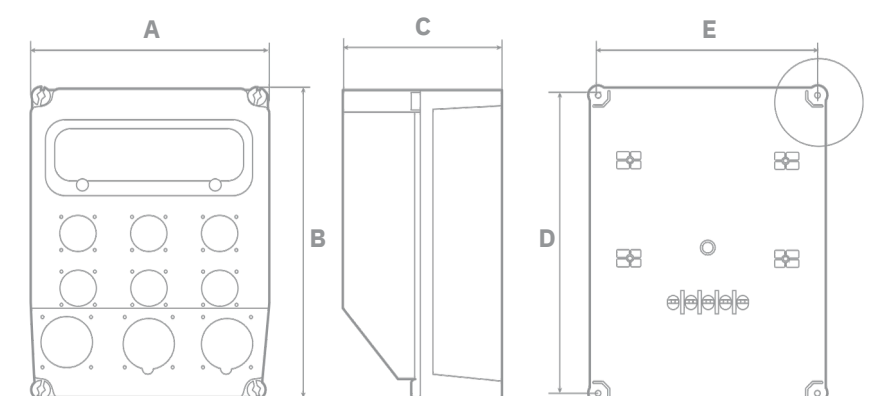

297,55€ + IVA




POSTO MÓVEL PIMENTEIRO DE OBRA - IP44

Conteúdo do quadro:

- > 4 Tomadas schuko de encastrar (ASTI112R) > 4 Tomadas schuko de encastrar (ASTI112R) > 2 Tomada fêmea encast. 16A 3P+T 400V 6H IP44 > 1 CABO HO7RN-F 5G2,5mm2 2m > 1 Ficha industrial macho 16A 3P+T+N 400V 6H IP44 (ASF1015)

REF.	AxBxC		EAN.
ASPMPO193360	193x360x206 mm	4	5604612736828

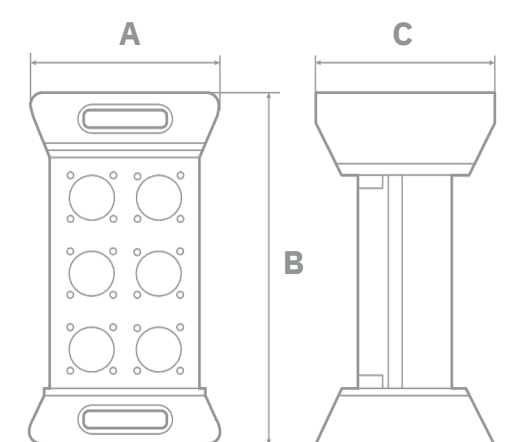

133,4€ + IVA